

Telpeo

Face Recognition

Temperature Measurement Terminal

Contactless temperature detection + face recognition supporting data report

TPS980T

Infrared Thermography Testing

Error range: $\pm 0.3^{\circ}\text{C} / \pm 0.6^{\circ}\text{F}$
Distance: 50~70cm


Binocular Liveness Detection

Recognition rate > 99.5%

8 Inch Touch Screen

Display measured temperature

NFC Card Reader

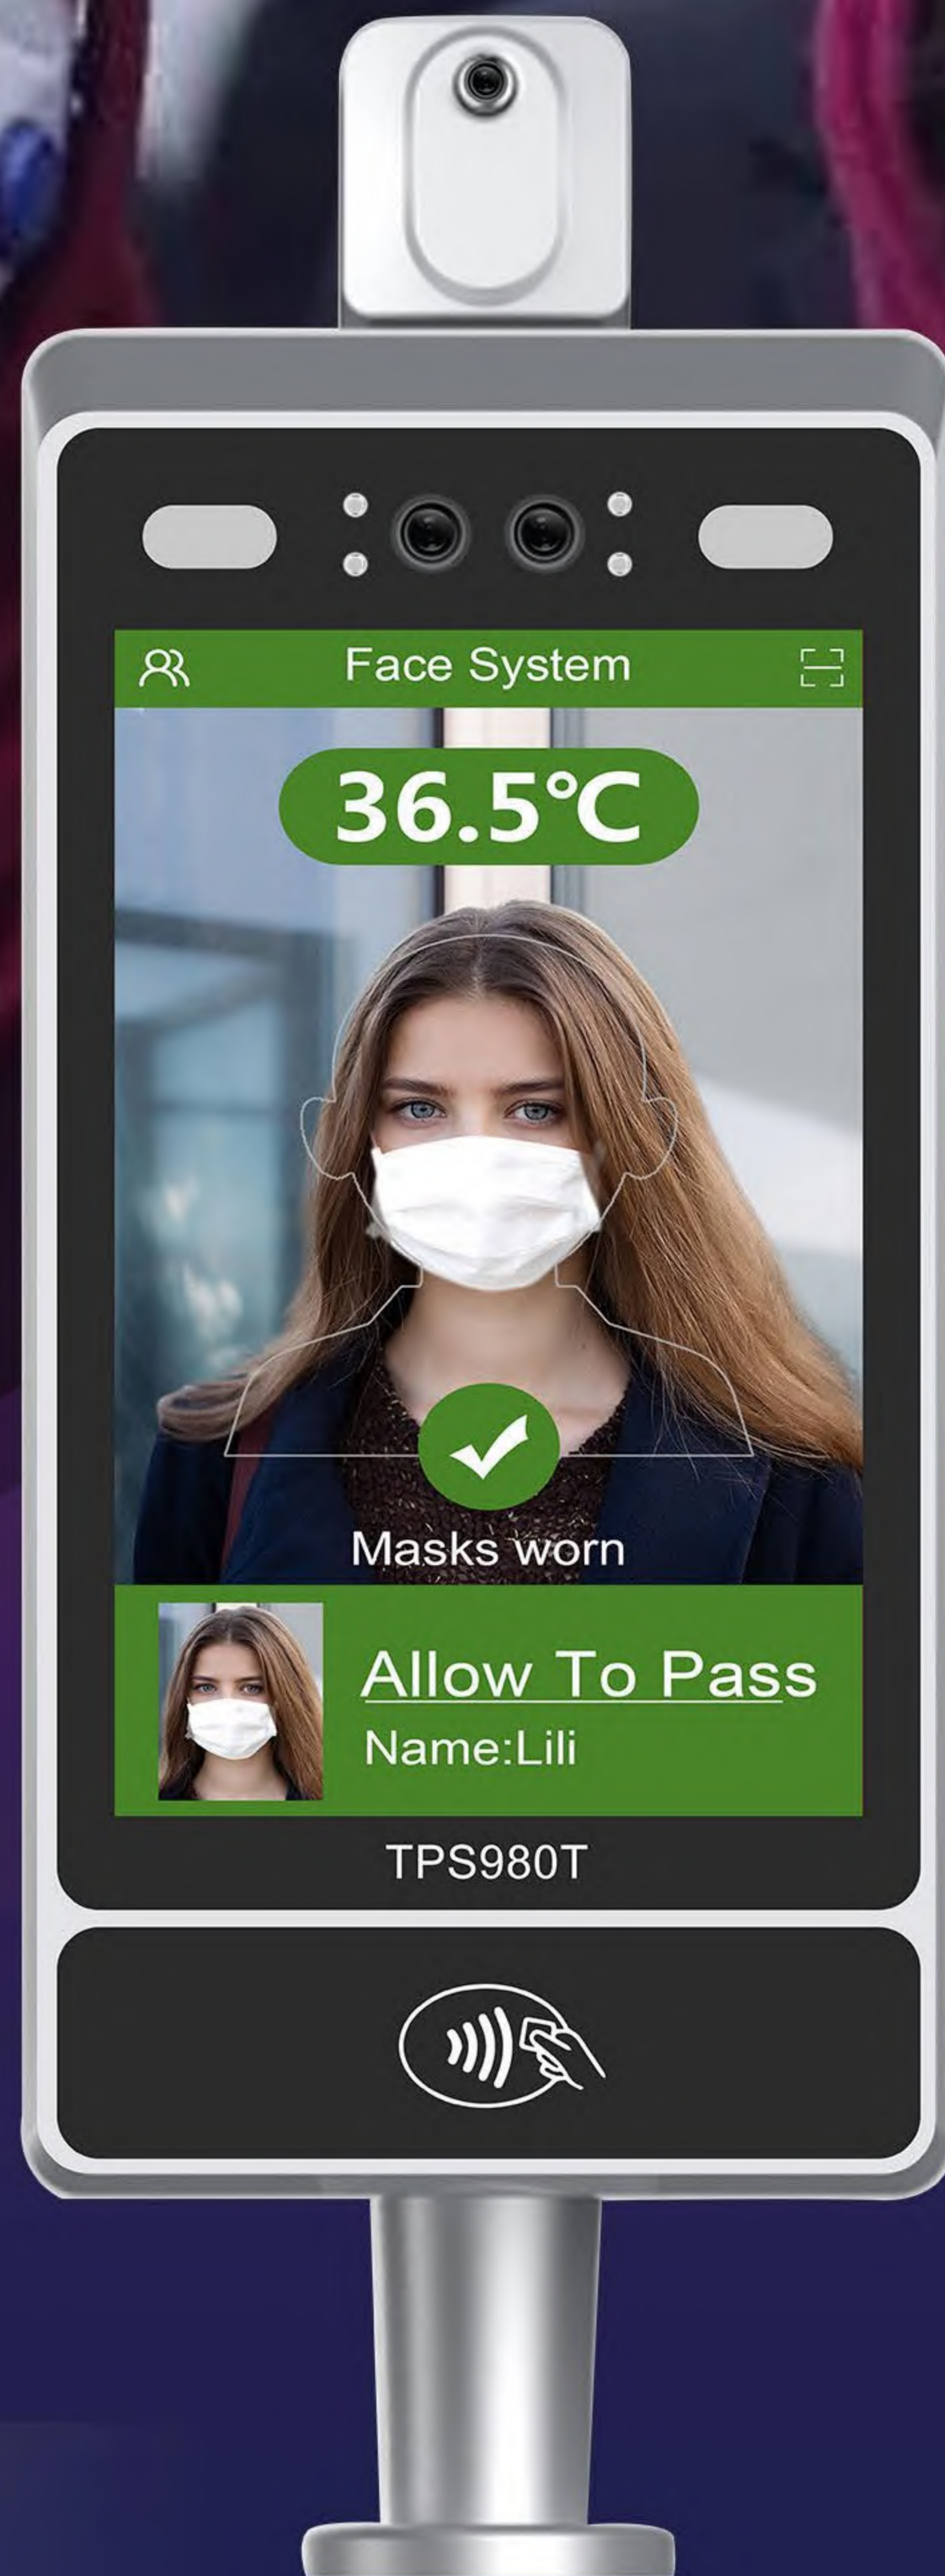

Office



Customs



Hotel



School



Factory



Bus



Amusement Park

TPS980T

Face Recognition Temperature Measurement Terminal



Specification	
Chipset(alternative)	Chipset: Rockchip OS: Android 7.1 CPU: Dual-Core 1.8GHz + Quad-Core 1.4GHz Memory: 4GB DDR, 16GB eMMC Chipset: Qualcomm OS: Android 8.1 CPU: Octa-Core 1.8GHz Memory: 2GB DDR, 16GB eMMC
Display	8-inch, 800*1280
Keys	1 Reset Key
Sensor (Optional)	Infrared Sensor
Front Camera	Dual-lens Camera (RGB+IR) Single-lens Camera (RGB) (Optional) 3D Depth Sensing Camera (Optional)
Fill Light	White LED
Contactless Card Reader (Optional)	ISO14443 Type A/B, Mifare, ISO18092 compliant
SIM Slots (Optional)	1 SIM
Communications	Ethernet/WiFi/Bluetooth LTE (Optional)
Temperature Measurement	Distance : 50 ~ 70cm Accuracy : $\pm 0.3^{\circ}\text{C} / \pm 0.6^{\circ}\text{F}$
Peripheral Ports	1 DC Port, 1 RJ45, 1 micro USB, 1 Wiegand, 1 RS485
Audio	Digital Audio Speaker, Microphone
Power Supply	12V/2A, POE(Optional)
Bracket (Optional)	Wall Mount Bracket, Turnstile Mount Bracket
Dimensions (mm)	323 (L)*135 (W)*30 (H)
MDM (Optional)	Mobile Device Management
Certification	CE, FCC, KC, RoHS, TELEC, Anatel, BIS

Note: Reserve the right to change the parameters without prior notice.

Accessories (Optional)

Height and Angle

Application

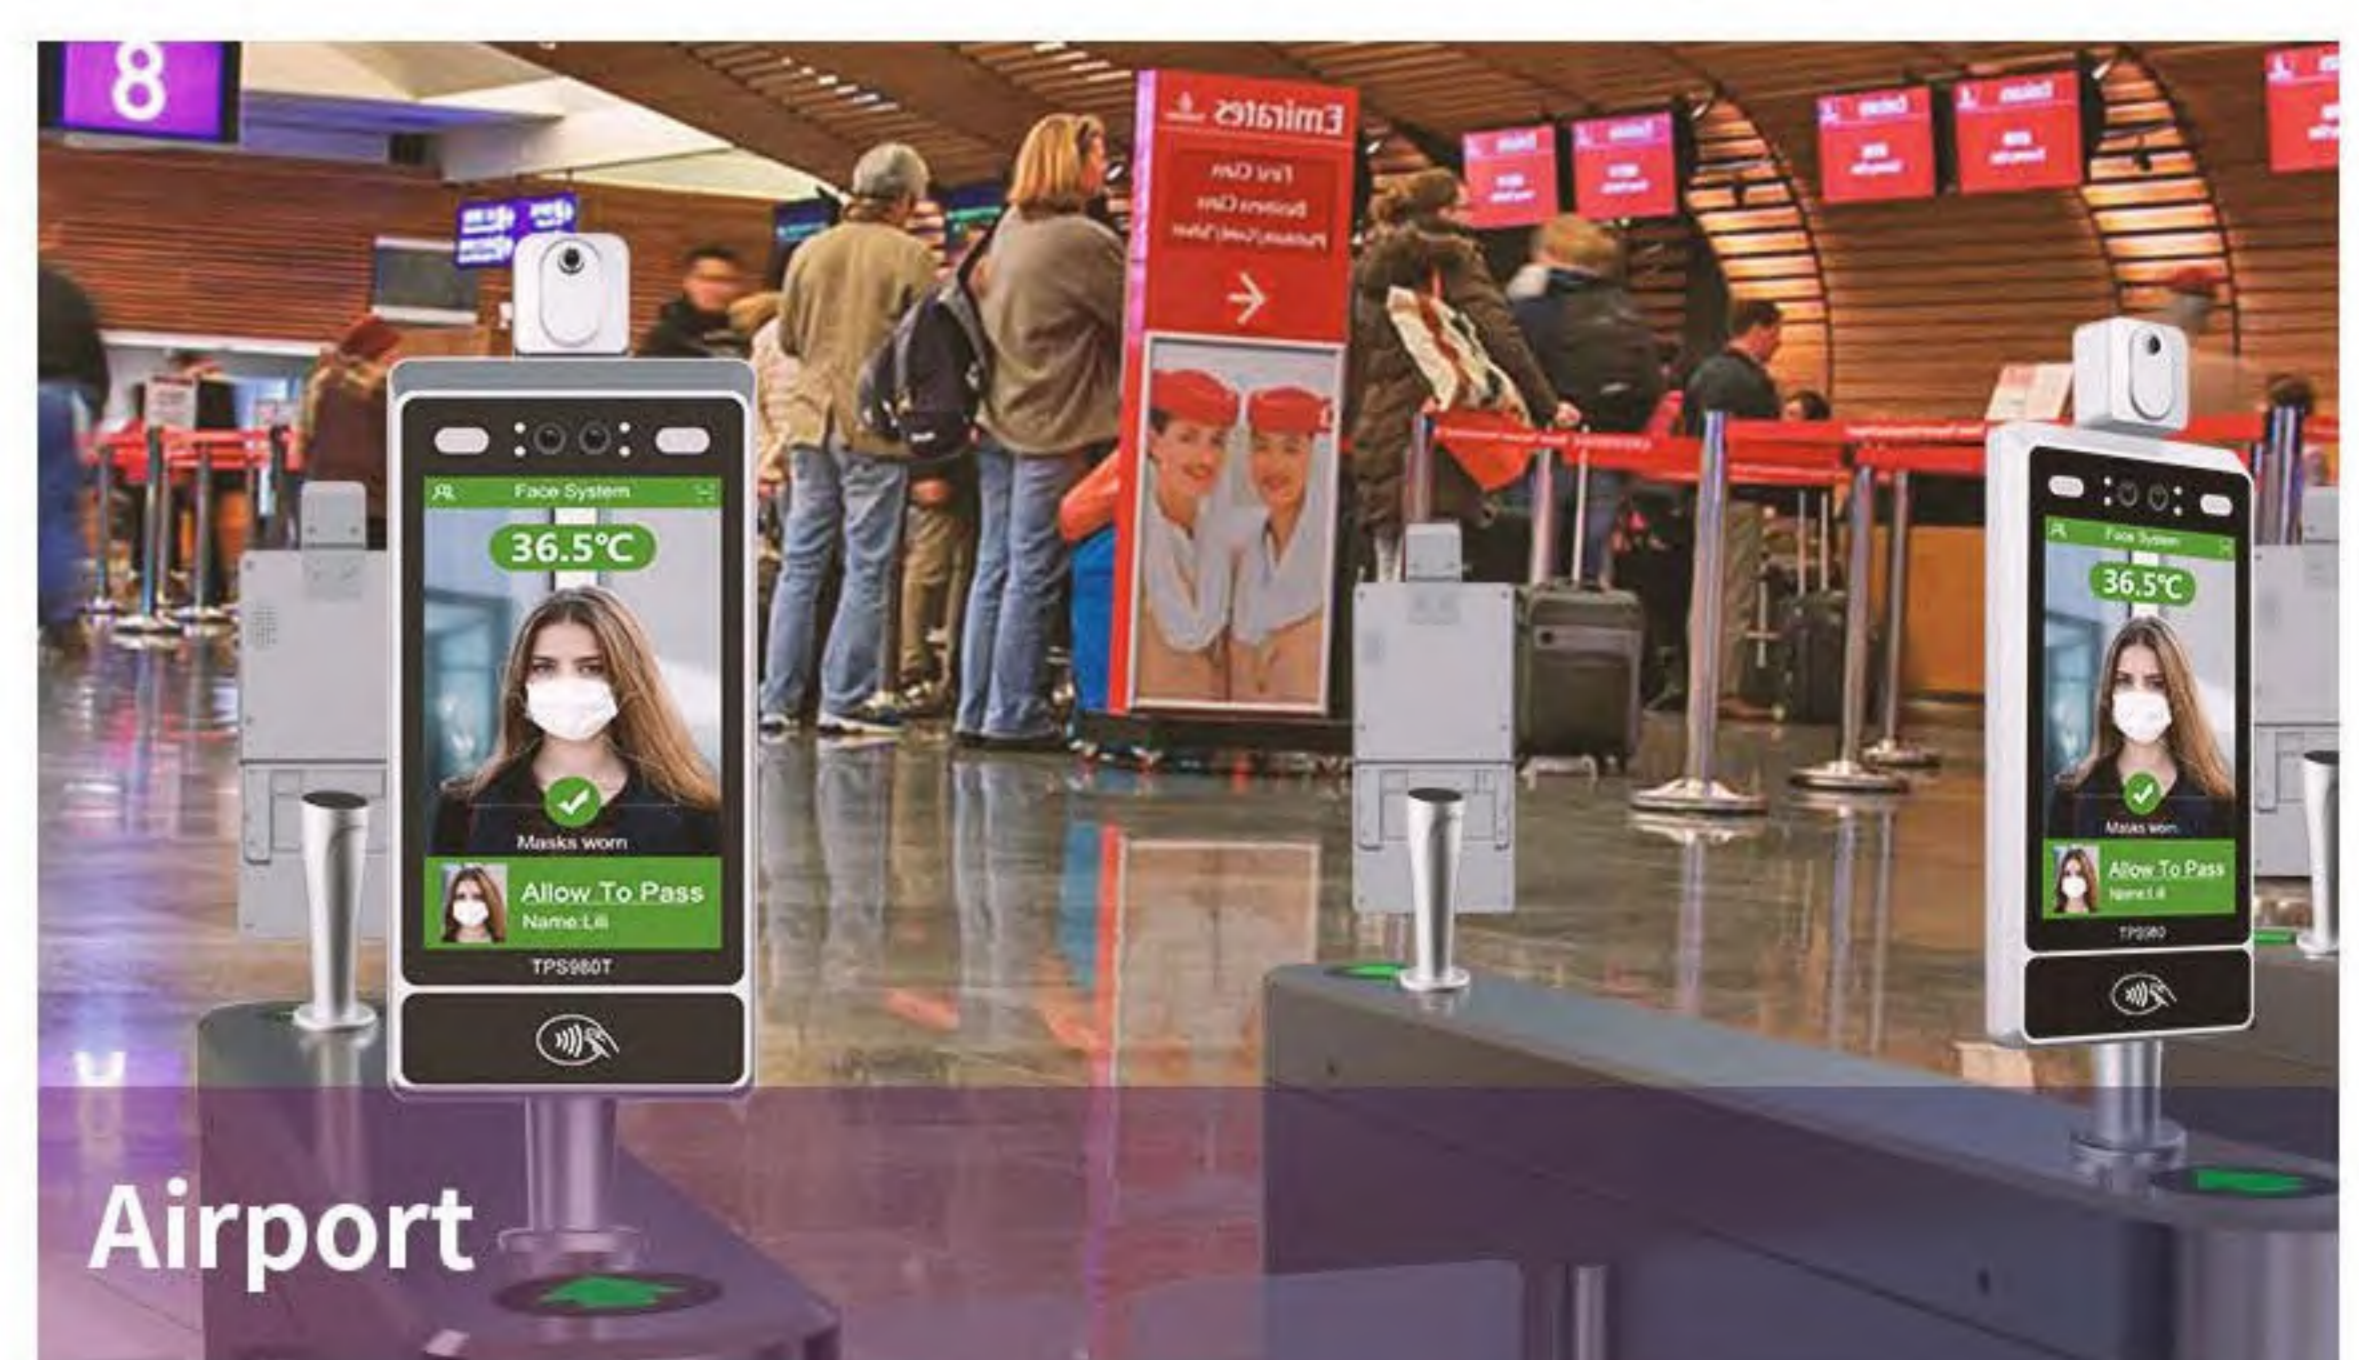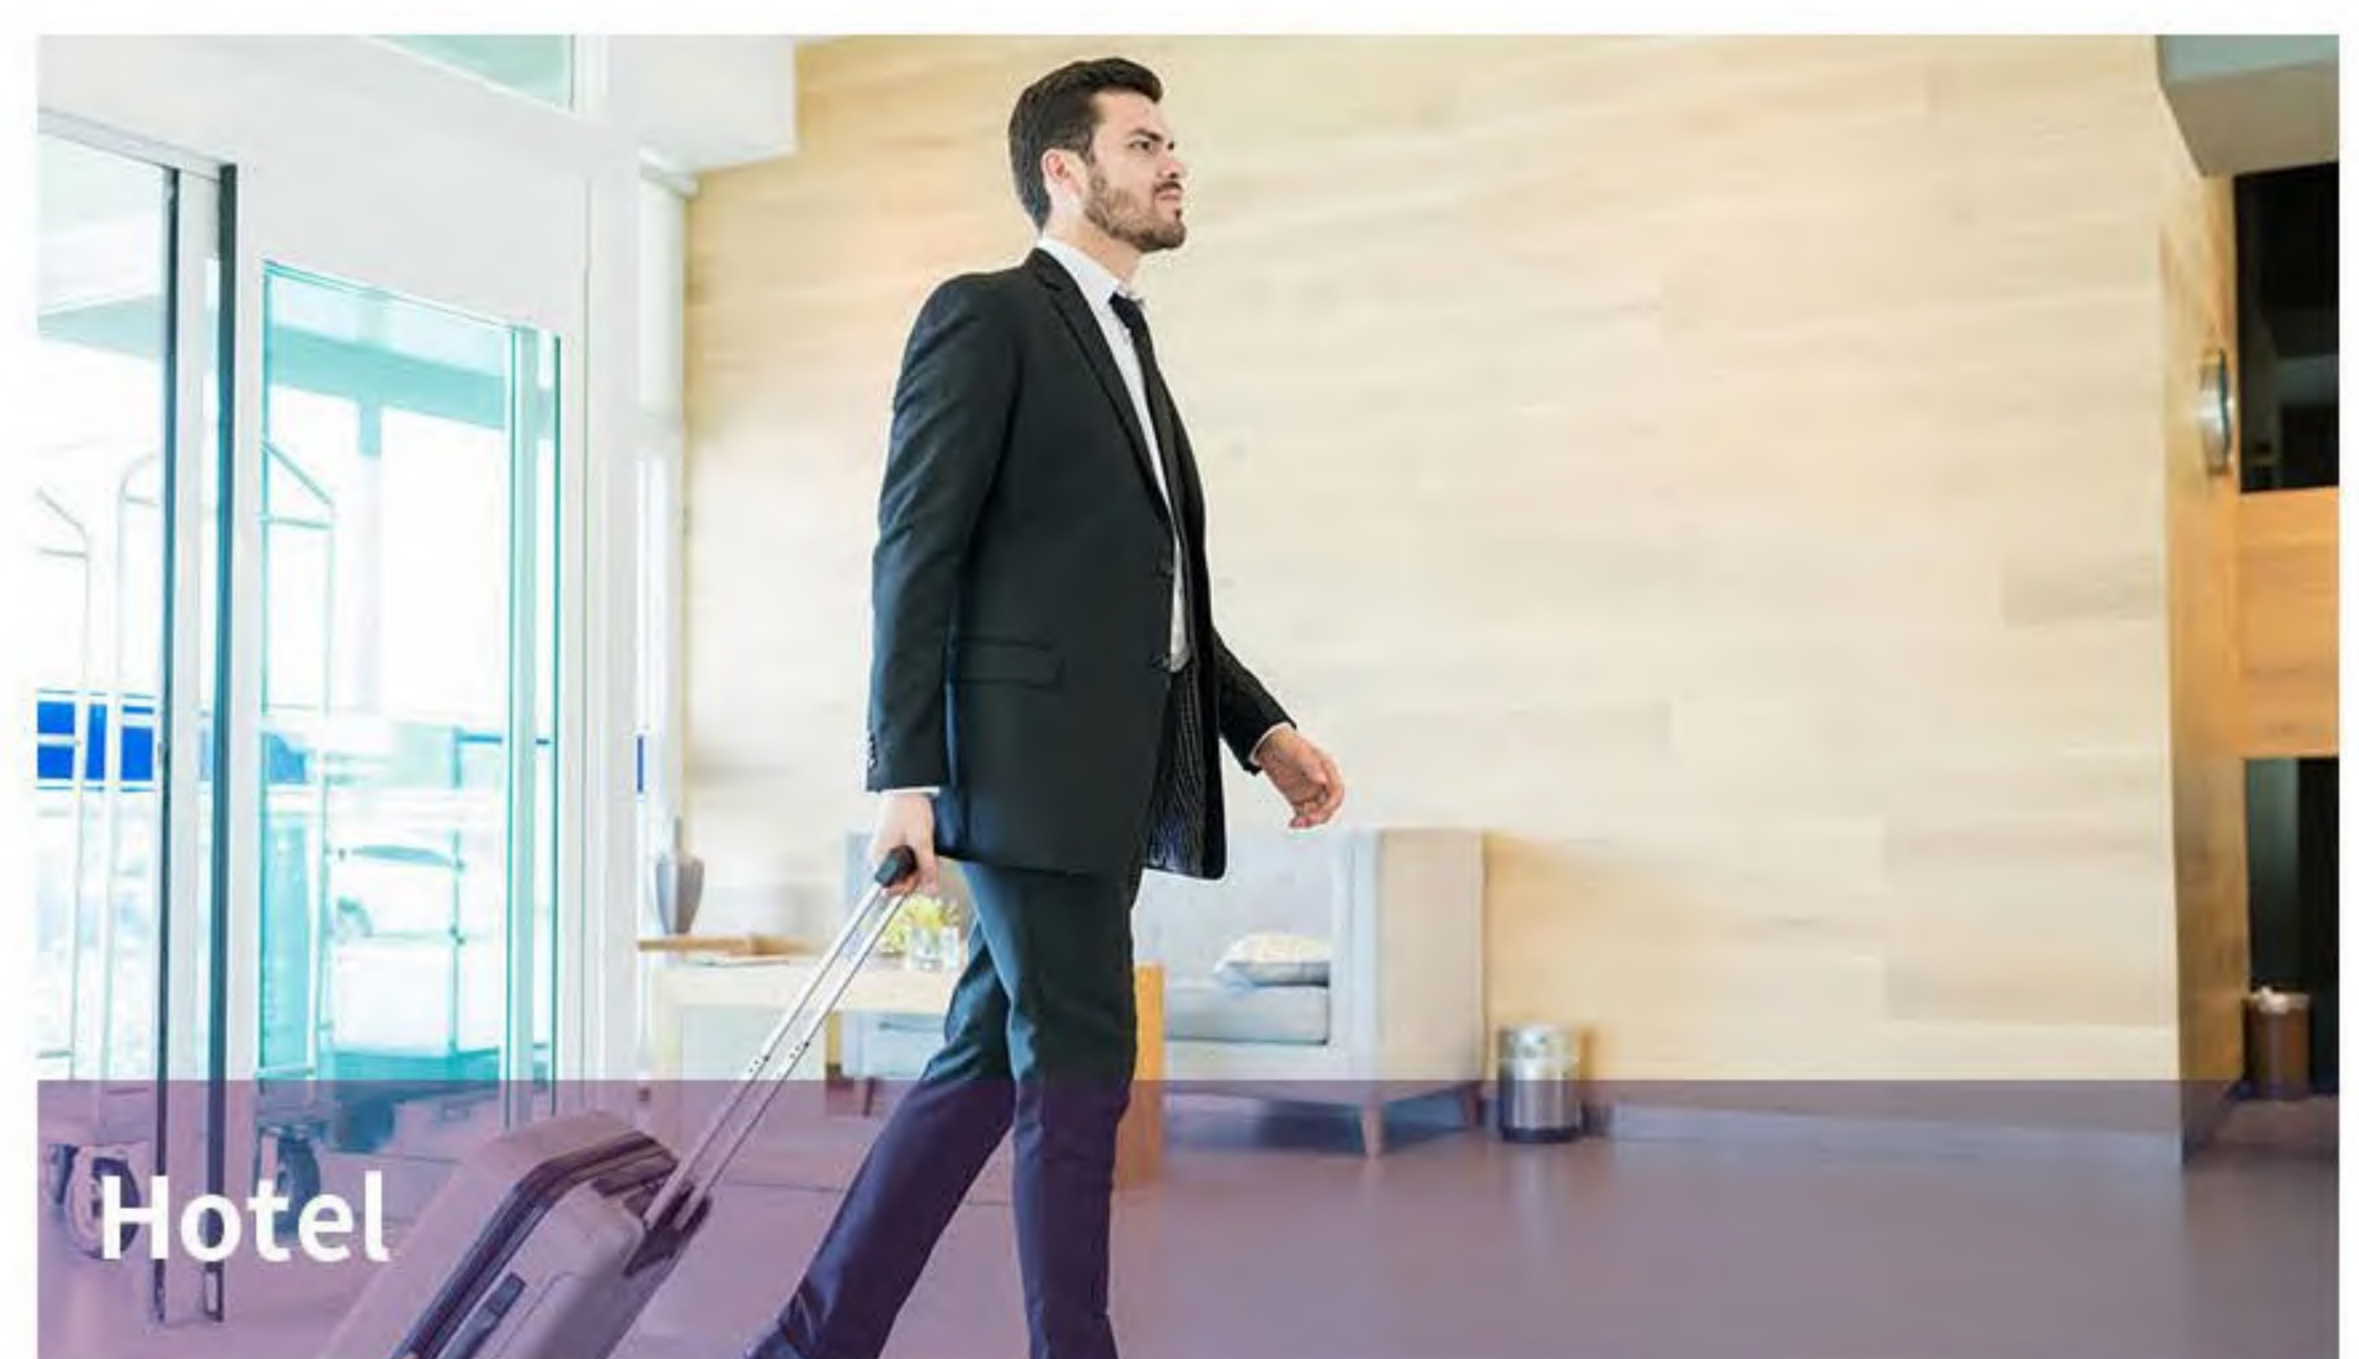

Telepower Communication Co.,Ltd.

E-mail: business@telpeo.com Skype: [telpeo_business](https://www.skype.com/name/telpeo_business)

Web: www.telpeo.com.cn

Add: Foshan City, Guangdong Province, China

